


Mounting instructions

Installation instructions

Before installation and use check whether the identification number on the product or on the packaging matches the respective designation on the delivery note.

Operating temperature range: -30 °C to +80 °C

Operating total load (respective type): See table

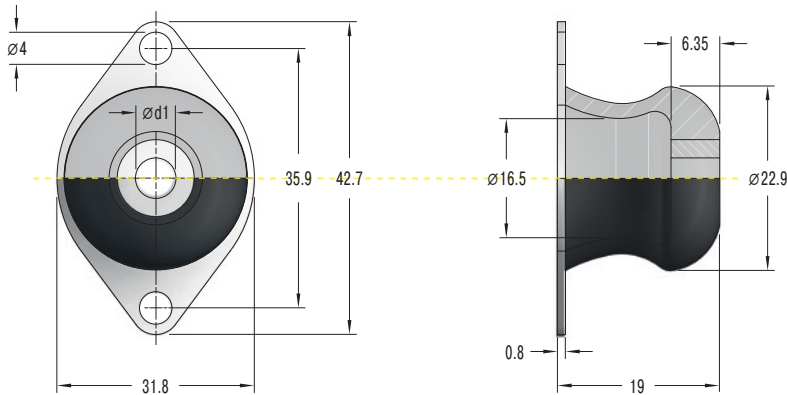

WARNING

Exceeding the temperature range can lead to a premature failure of the product.

Use only in the load range according to the table and do not exceed or fall below.

Must not come into contact with harsh cleaning agents as well as petrol or benzene, as these can attack the product.

Mounting instructions

1. Secure Bubble Mount to the component at the intended installation points through hole A using bolt and nut.
2. Position component and bolt to the counterpart through the 4 mm holes.

Performance and dimensions				
TYPES	* Colour code	Load min.		$\varnothing d1$ mm
		kg	kg	
BM-50640	yellow	0.7	1.8	4.3
BM-50641	red	1.2	2.9	4.3
BM-50642	green	2.2	5.4	4.3
BM-50643	blue	2.7	6.8	4.3
BM-50644	white	3.3	8.2	4.3
BM-50680	yellow	0.7	1.8	6.5
BM-50681	red	1.2	2.9	6.5
BM-50682	green	2.2	5.4	6.5
BM-50683	blue	2.7	6.8	6.5
BM-50684	white	3.3	8.2	6.5

* The colour code serves to identify the loading capacity. The products are colour-coded accordingly.

Packaging disposal

Please dispose of the transportation packaging in an environmentally-friendly manner. Recycling packaging materials saves raw materials and reduces waste. The packaging materials do not contain any prohibited materials.