

Mounting instructions



Installation instructions

Before installation and use check whether the identification number on the product or on the packaging matches the respective designation on the delivery note.

Operating standard temperature range: -30 °C to +80 °C

Operating temperature range (special silicone version):
-60 °C to +150 °C

Operating total load (respective type): see table

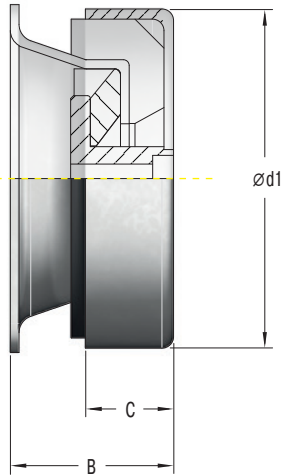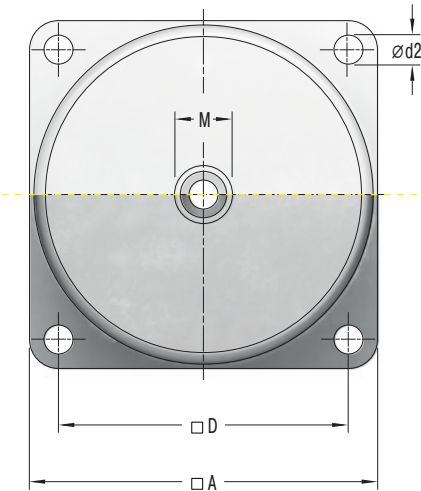

WARNING

- Exceeding the temperature range can lead to a premature failure of the product.
- Use only in the load range according to the table and do not exceed or fall below.
- Must not come into contact with harsh cleaning agents as well as petrol or benzene, as these can attack the neoprene elastomer/silicone insert.
- The neoprene elastomer insert must not come into contact with sharp objects, as it may become damaged as a result.

Mounting instructions

- Position Cup Mounts to the respectively calculated supporting points underneath the machine to be isolated.
- Connect the Cup Mounts to the machine to be isolated with bolts (see table). The maximum screw depth must be taken into account according to the table.
- After the final position alignment, bolt the Cup Mounts to the base.

Packaging disposal

Please dispose of the transportation packaging in an environmentally-friendly manner. Recycling packaging materials saves raw materials and reduces waste. The packaging materials do not contain any prohibited materials.

Performance and dimensions

Types	Load min. kg	Load max. kg	M	Screw depth mm	A mm	B mm	C mm	D mm	Ød1 mm	Ød2 mm	Weight kg
CM-VSC1-2	3	16	M6 or M8	20	60	28	18	49.5	58	5.5	0.2
CM-VSC1-4	7	35	M6 or M8	20	60	28	18	49.5	58	5.5	0.2
CM-VSC1-7	14	60	M6 or M8	20	60	28	18	49.5	58	5.5	0.2
CM-VSC1-10	25	100	M6 or M8	20	60	28	18	49.5	58	5.5	0.2
CM-VSC2-5	9	35	M10 or M12	30	76	38	25	63.5	76	6.4	0.45
CM-VSC2-10	14	60	M10 or M12	30	76	38	25	63.5	76	6.4	0.45
CM-VSC2-15	25	90	M10 or M12	30	76	38	25	63.5	76	6.4	0.45
CM-VSC2-25	50	200	M10 or M12	30	76	38	25	63.5	76	6.4	0.45
CM-VSC2-40	35	250	M10 or M12	30	76	38	25	63.5	76	6.4	0.45
CM-VSC3-25	25	210	M16	19	133	63	38	108	124	11.9	1.8
CM-VSC3-40	45	350	M16	19	133	63	38	108	124	11.9	1.8
CM-VSC3-65	60	500	M16	19	133	63	38	108	124	11.9	1.8
CM-VSC3-90	80	750	M16	19	133	63	38	108	124	11.9	1.8