


Mounting instructions

Installation instructions

Before installation and use check whether the identification number on the product or on the packaging matches the respective designation on the delivery note.

Operating temperature range: -30 °C to +80 °C

Operating total load (respective type): see table

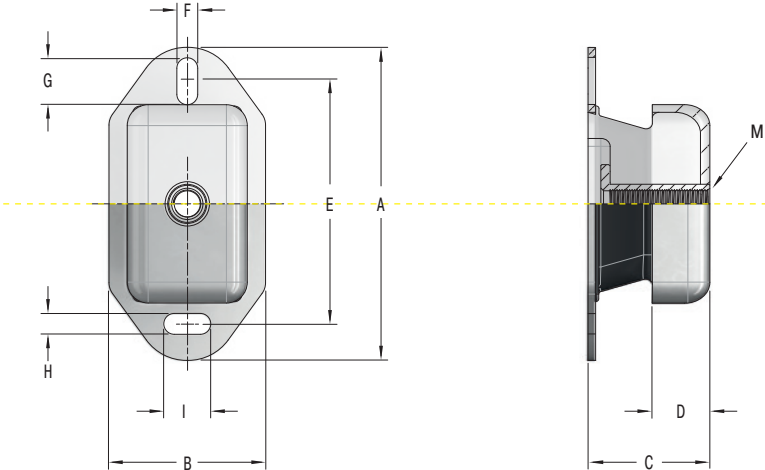

WARNING

Exceeding the temperature range can lead to a premature failure of the product.

Use only in the load range according to the table and do not exceed or fall below.

Must not come into contact with harsh cleaning agents as well as petrol or benzene, as these can attack the neoprene elastomer.

The neoprene elastomer must not come into contact with sharp objects, as it may become damaged as a result.

Mounting instructions

1. Position Stable Flex Mounts to the respectively calculated supporting points underneath the elements to be isolated.
2. Connect the Stable Flex Mounts to the elements to be isolated with bolts (see table).
3. After the final position alignment, bolt the SFM to the base.

Performance and dimensions												
Types	Load min. kg	Load max. kg	M	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm
SFM-52010-45	20.0	49.9	M12	119.9	59.9	38.6	20.1	100.1	14.2	14.0	10.9	14.0
SFM-52010-55	26.3	65.8	M12	119.9	59.9	38.6	20.1	100.1	14.2	14.0	10.9	14.0
SFM-52010-65	39.9	99.8	M12	119.9	59.9	38.6	20.1	100.1	14.2	14.0	10.9	14.0
SFM-52010-75	48.1	120.2	M12	119.9	59.9	38.6	20.1	100.1	14.2	14.0	10.9	14.0
SFM-52011-45	59.9	149.7	M16	182.9	74.9	50.0	27.9	140.0	13.0	20.3	13.0	30.0
SFM-52011-55	84.4	210.9	M16	182.9	74.9	50.0	27.9	140.0	13.0	20.3	13.0	30.0
SFM-52011-65	119.8	299.4	M16	182.9	74.9	50.0	27.9	140.0	13.0	20.3	13.0	30.0
SFM-52011-75	179.6	449.1	M16	182.9	74.9	50.0	27.9	140.0	13.0	20.3	13.0	30.0
SFM-52012-45	139.7	349.3	M20	228.1	112.0	72.6	41.9	182.1	18.0	26.7	18.0	34.0
SFM-52012-55	207.8	519.4	M20	228.1	112.0	72.6	41.9	182.1	18.0	26.7	18.0	34.0
SFM-52012-65	281.2	703.1	M20	228.1	112.0	72.6	41.9	182.1	18.0	26.7	18.0	34.0
SFM-52012-75	399.2	997.9	M20	228.1	112.0	72.6	41.9	182.1	18.0	26.7	18.0	34.0

Packaging disposal

Please dispose of the transportation packaging in an environmentally-friendly manner. Recycling packaging materials saves raw materials and reduces waste. The packaging materials do not contain any prohibited materials.